


The Panic Button specifications

Copyright disclaimer: This document discusses in detail proprietary technical information. Reproduction, dissemination, and editing of this document, as well as utilization of the content, are forbidden without permission.

Panic Button Features

- Connectivity
- Cellular - LTE Cat-M1 and NB-IoT
- WiFi
- Bluetooth Low Energy
- Precise location positioning
- Outdoor - GNSS, BLE, WiFi
- Indoor - BLE, WiFi
- Cellular Antenna
- Internal
- Planar
- Omni-directional
- Certifications
- FCC (15B [unintentional radiation emissions] and Part 2.1093 [SAR exposure])
- PTCRB
- T-Mobile certification
- AT&T FirstNet
- Two programmable SOS buttons
- Haptic feedback
- Battery/Device status LED lights
- Rechargeable battery via USB-C
- Over-the-air firmware updates
- Barometric pressure sensor (with temperature sensor)

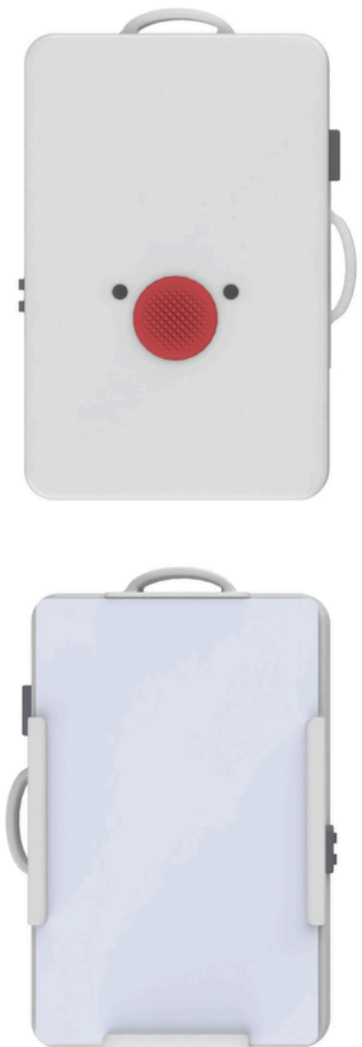

Panic Button Specifications

Dimensions	89mm x 57mm x 8mm
Weight	60 grams
LPWAN Technologies	LTE Cat-M1, NB-IoT
LTE-M Bands	2 , 4 , 12
NB-IoT Bands	2 , 4 , 12
Location Methods	GPS, BLE, WiFi
Firmware Update	Cellular OTA, BLE, WiFi
Operating Temperatures	-10°C to 60°C
GNSS Antenna Pattern	Omni-directional
Battery	Lithium polymer rechargeable via USB-C
Battery Capacity	580 mAh
Low Battery Indication	LED, Piezo (configurable), Server
Human Interface	2 x Buttons, 2 x RGB LEDs, Haptic Buzzer
Additional Sensors	Barometric pressure, Accelerometer



For more information, contact:

 sales@premierwireless.com
 (281) 667-0404

premierwireless.com